



# RotaDairon® ED 130 & ED 180

## 2 Maintenance Tools in 1

### # 1 DETHATCHER




PTO driven, the ED is a precise dethatcher, capable to work fine from 0 to 60 mm (2"2/5), fast and clean

### # 2 SPIKER



Without the PTO (dismounted) and by rolling, the ED becomes the ideal spiking machine for golf greens and athletic fields.

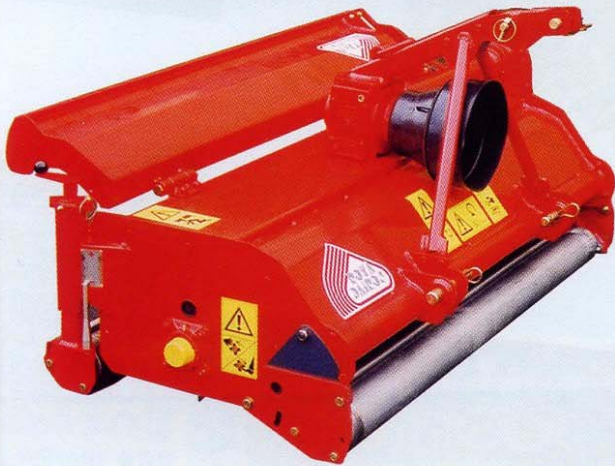

Lift-up cover, depth gauge,  
2-position depth adjustment, depending  
on knife wear and application

### Technical Data

DETHATCHER	ED 130	ED 180
Weight	370 kg 820 lbs	510 kg 1125 lbs
Work width	1300 mm 52"	1800 mm 72"
Number of sharpened knives	159	222
Number of knife support discs	53	74
Gap between knives	23 mm 9/10"	
Required power	25 to 40 HP	30 to 60 HP
Work depth settings	Front roller with 2 positions (I, II) rear roller with depth gauge	
Transmission	Oil bath chain	
3 point hitch	Categories 1 & 2	
PTO shaft rotation speed	540 RPM	
Dimensions : L x W x H	800 x 1500 x 750 mm 30" x 60" x 30"	800 x 2084 x 750 3" x 60" x 30"
Standard equipment	Cast casing, Stainless steel rollers, Knife support discs - Height adjustment Multi-position rear cover.	

• This document is not contractually binding • Patent pending

MGE Le Mans - ITF Imprimeurs - 51532 ED 130 - 12/2005

## DAIRON S.A.S

Les Hunaudières - D 92  
72230 MULSANNE - FRANCE  
Tel. : (33) 02 43 23 09 10  
Fax : (33) 02 43 23 14 97  
E.mail : MGE@mge-dairon.com  
web : www.mge-dairon.com

Your dealer

### Knives changed easily, quickly and safely



Loosening of rotor nut  
with 2 special keys  
(supplied)



Fitting by insertion of knives  
between 2 support discs

### Knife support discs



Support discs with  
indentation and support  
system (patent pending)